


**The dependence of resistance on temperature of NTC sensors of boilers Protherm**

T (°C)	0	1	2	3	4	5	6	7	8	9
<b>-60</b>						977574	908043	843909	784720	730066
<b>-50</b>	679571	632894	589724	549774	512787	478525	446770	417324	390006	364649
<b>-40</b>	341101	319222	298884	279969	262370	245988	230730	216514	203262	190903
<b>-30</b>	179372	168609	158558	149168	140392	132185	124509	117325	110599	104299
<b>-20</b>	98397	92864	87676	82809	78241	73953	69925	66140	62583	59239
<b>-10</b>	56093	53132	50346	47722	45250	42921	40725	38654	36701	34858
<b>0</b>	33118	31475	29953	28456	27070	25760	24520	23347	22237	21186
<b>10</b>	20190	19247	18354	17507	16703	15942	15219	14533	13882	13263
<b>20</b>	12676	12118	11587	11083	10603	10147	9713	9300	8907	8532
<b>30</b>	8176	7836	7512	7203	6909	6628	6360	6105	5861	5628
<b>40</b>	5406	5193	4990	4796	4611	4434	4264	4102	3947	3799
<b>50</b>	3657	3521	3390	3266	3146	3032	2922	2817	2716	2619
<b>60</b>	2526	2437	2352	2270	2191	2116	2043	1973	1906	1842
<b>70</b>	1780	1720	1663	1608	1555	1504	1455	1408	1363	1319
<b>80</b>	1277	1236	1197	1160	1123	1088	1055	1022	991	961
<b>90</b>	931	903	876	850	825	800	777	754	732	711
<b>100</b>	690	670	651	633	615	597	581	564	549	534
<b>110</b>	519	505	491	478	465	452	440	428	417	406
<b>120</b>	395	385	375	365	347					

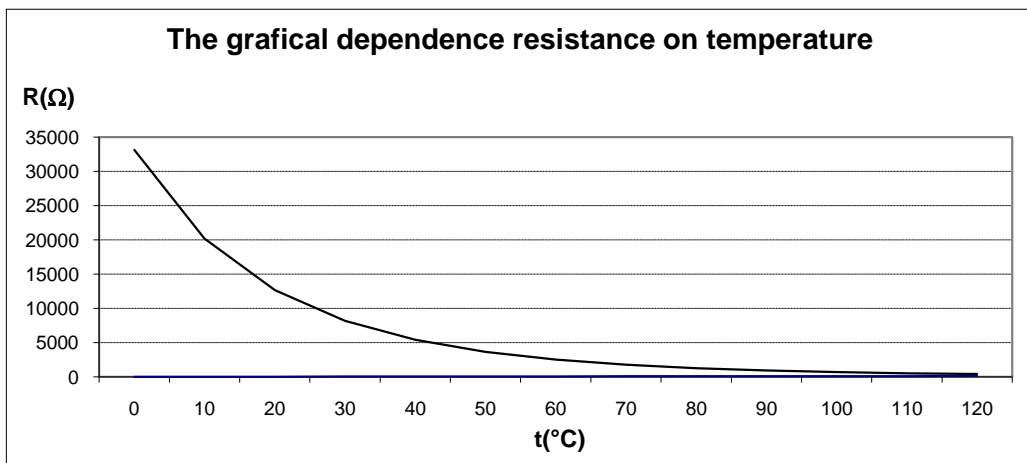

The maximum length of lead wire is 30 m.